




## XT IEC Power Control

Quick Reference Guide

**Contactors  
Starters  
Manual Motor  
Protectors**



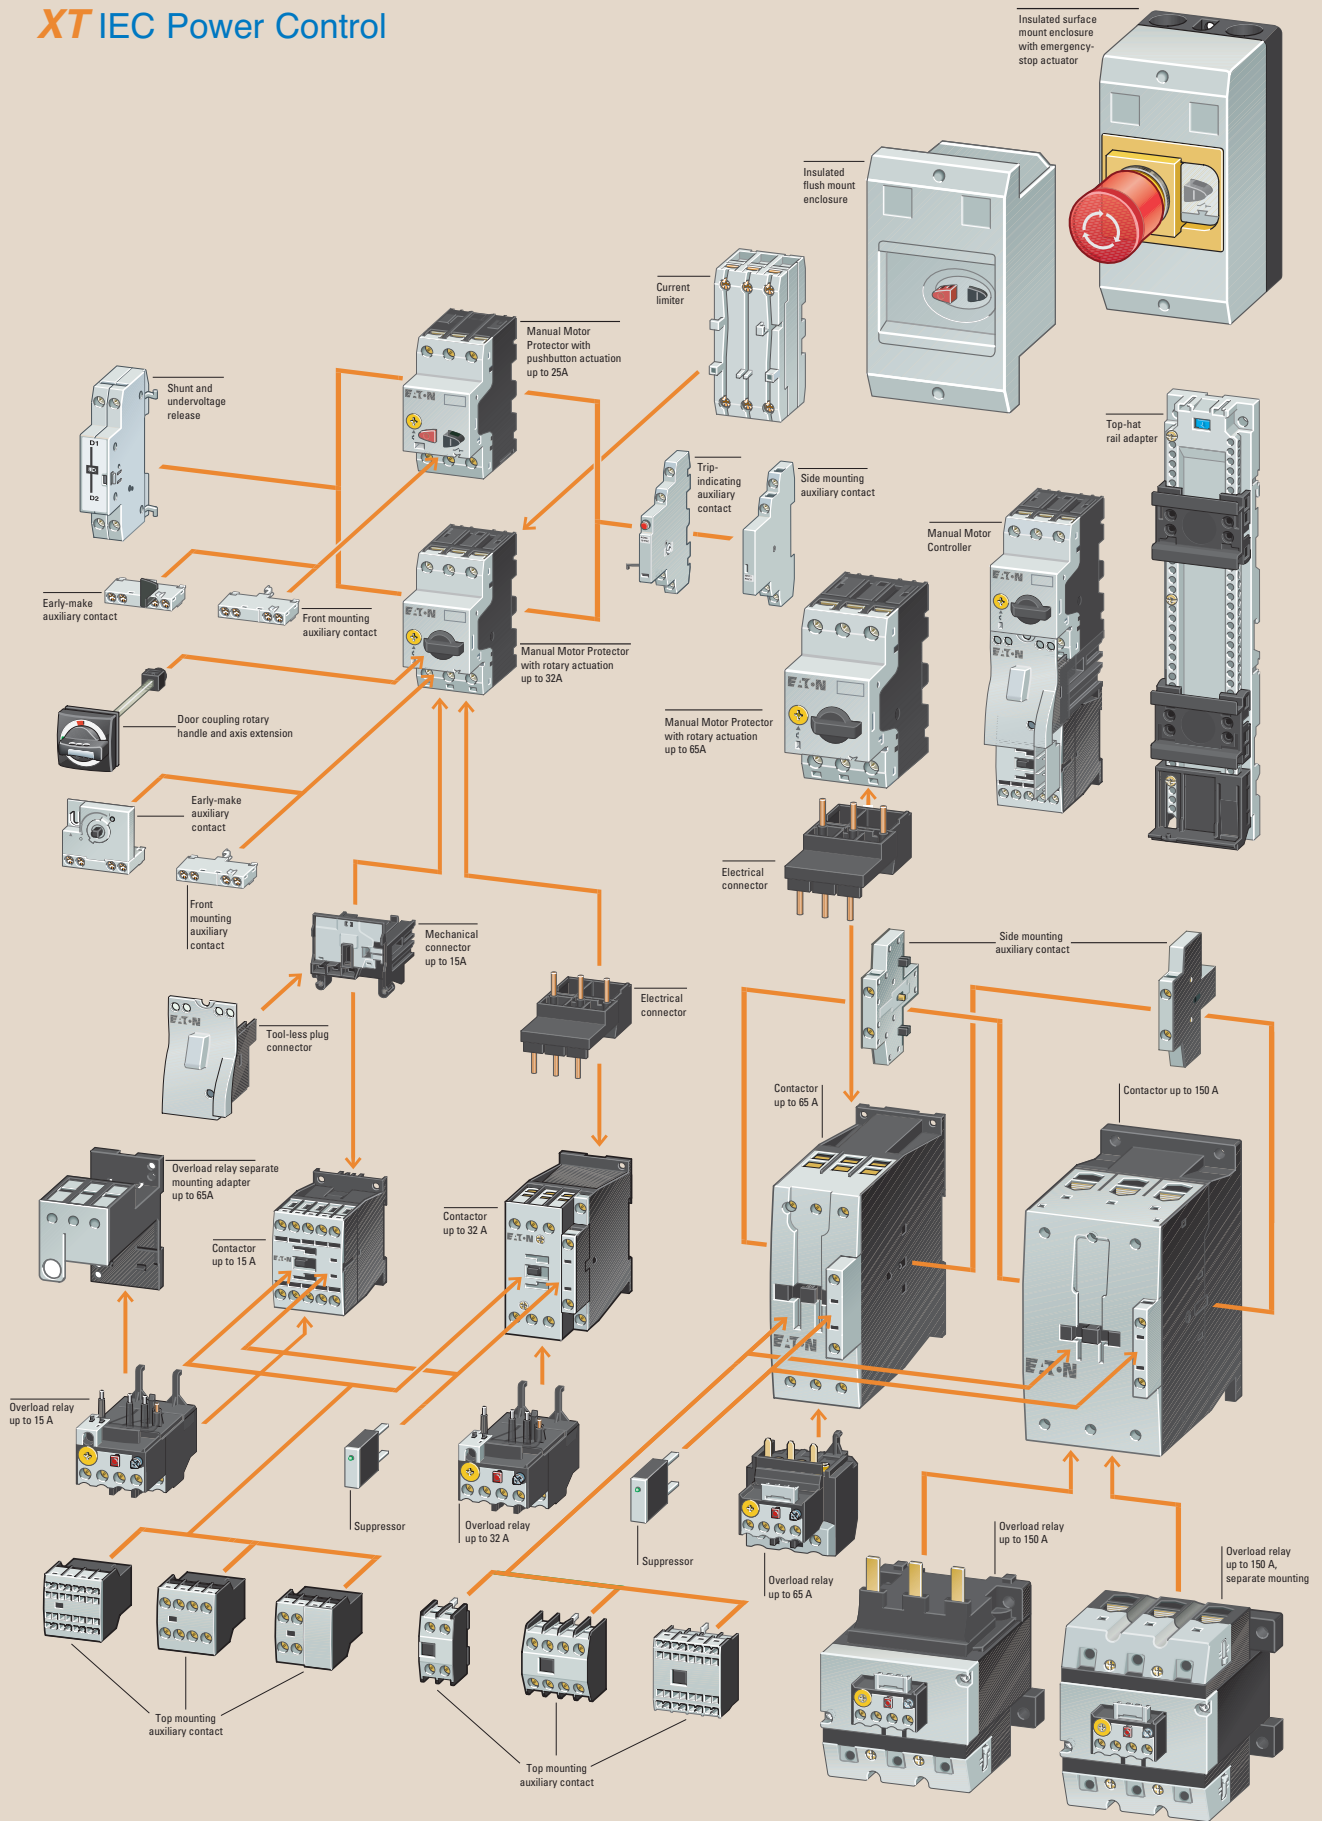


# XT IEC Power Control



Also available (not shown):

- XT Mini Contactors, 6-9A
- XT Contactors up to 2000A
- XT Overload Relays up to 630A

## XT Manual Motor Protectors

						
Catalog Number Selection	kW@ 400V	Max hp @ 460V	Amp Range	Pushbutton B-Frame	Rotary B-Frame	Rotary D-Frame
<b>Example:</b> <b>XTPB P16 B C1</b> Prefix      Frame Size      Max Overload Setting      Trip Class C1 = 10	⓪	⓪	0.1 – 0.16	XTPBP16BC1	XTPRP16BC1	
	0.06	⓪	0.16 – 0.25	XTPBP25BC1	XTPRP25BC1	
	0.09	⓪	0.25 – 0.40	XTPBP40BC1	XTPRP40BC1	
	0.12	⓪	0.40 – 0.63	XTPBP63BC1	XTPRP63BC1	
	0.25	1/2	0.63 – 1.0	XTPB001BC1	XTPR001BC1	
	0.55	3/4	1.0 – 1.6	XTPB1P6BC1	XTPR1P6BC1	
	0.75	1	1.6 – 2.5	XTPB2P5BC1	XTPR2P5BC1	
	1.5	2	2.5 – 4.0	XTPB004BC1	XTPR004BC1	
	2.2	3	4.0 – 6.3	XTPB6P3BC1	XTPR6P3BC1	
	4.0	7-1/2	6.3 – 10	XTPB010BC1	XTPR010BC1	
	5.5	7-1/2	8 – 12	XTPB012BC1	—	
	7.5	10	9 – 12	—	XTPR012BC1	
	7.5	10	10 – 16	XTPB016BC1	XTPR016BC1	XTPR016DC1
	9.0	10	16 – 20	XTPB020BC1	XTPR020BC1	XTPR025DC1
	12.5	15	20 – 25	XTPB025BC1	XTPR025BC1	XTPR025DC1
	15	25	25 – 32		XTPR032BC1	XTPR032DC1
	20	30	32 – 40			XTPR040DC1
	25	30 <sup>⓪</sup>	40 – 50			XTPR050DC1
	30	40 <sup>⓪</sup>	50 – 58			XTPR058DC1
	34	—	55 – 65			XTPR063DC1
Width		mm		45	45	55
Height		mm		93	93	140
Depth		mm		90.5	76	160
Auxiliary contact modules, front mount				XTPAXFA <sup>⓪</sup>		
Auxiliary contact modules, side mount				XTPAXSA <sup>⓪</sup>		
Short circuit breaking capacity I <sub>cu</sub> at 10A / 400V		kA		50 AC/60 DC	150 AC/60 DC	—
Short circuit breaking capacity I <sub>cu</sub> at 12A / 400V		kA		50 AC/60 DC	50 AC/60 DC	—
Short circuit breaking capacity I <sub>cu</sub> at 25A / 400V		kA		50 AC/60 DC	50 AC/40 DC	150 AC/60 DC
Short circuit breaking capacity I <sub>cu</sub> at 32A / 400V		kA		—	50 AC/40 DC	50 AC/60 DC
Short circuit breaking capacity I <sub>cu</sub> at 65A / 400V		kA		—	—	50 AC/60 DC
Electrical lifespan		Operations		50,000	100,000	30,000
Single-phasing sensitivity				yes	yes	yes
Undervoltage release				XTPAXUVR120V60H <sup>⓪</sup>		
Shunt release				XTPAXSR120V60H <sup>⓪</sup>		
Three-phase commoning link (number of MMPs on bus bar)		MMPs only		2 – 5	2 – 5	2 – 4
		With 1 aux		2 – 5	2 – 5	2 – 4
		With 2 aux		2 or 4	2 or 4	2 or 4

⓪ Use motor current for sizing.

⓪ Consult Eaton for availability.

⓪ Consult catalog for available auxiliary contact configurations.

⓪ Consult catalog for other voltage options.

### General Applications

Enclosed manual motor protectors (MMPs) are often specified for small fans and blower motors in commercial and industrial applications. OEM opportunities include woodworking machinery, small machine tools, pumps and compressors.

### Group Motor Applications

XT manual motor protectors are UL listed for group motor installations. A group motor installation consists of two or more motor circuits protected by a single set of fuses or circuit breaker. This eliminates the need for individual branch fusing or circuit protection.

The reduced cost of components, panel size, wiring, assembly charges and labor are substantial with group motor installations.

Consult NEC Article 430-52 for sizing the branch circuit protective device for a group motor application.

# XT IEC Power Control

	Frame Size A				Frame Size B								Frame Size C						Frame Size D				Frame Size F				Frame Size G					
<b>Contactor: Basic Catalog Number</b>	XTMC6A		XTMC9A		XTCE007B		XTCE009B		XTCE012B		XTCE015B		XTCE018C		XTCE025C		XTCE032C		XTCE040D		XTCE050D		XTCE065D		XTCE080F		XTCE095F		XTCE115G		XTCE150G	
<b>Current Ratings (I) IEC 60947-4-1 AC-1 Thermal Current I<sub>th</sub></b>	20 Amperes		20 Amperes		20 Amperes		20 Amperes		20 Amperes		20 Amperes		35 Amperes		40 Amperes		40 Amperes		50 Amperes		60 Amperes		72 Amperes		110 Amperes		110 Amperes		160 Amperes		160 Amperes	

AC-3 Operational Power Ratings I <sub>e</sub>	kW		hp		kW		hp		kW		hp		kW		hp		kW		hp		kW		hp		kW		hp		kW		hp			
	200V	—	—	1-1/2	—	2	—	—	1-1/2	—	3	—	—	3	—	—	5	—	—	10	—	—	10	—	—	20	—	—	25	—	—	40	—	—
220/230V	1.5	—	2	—	2.2	—	—	2	—	2.5	—	—	3	—	—	3	—	—	3	—	—	3	—	—	20	—	—	25	—	—	30	—	—	60
380/400V	3	—	—	—	4	—	—	—	—	4	—	—	5.5	—	—	7.5	—	—	7.5	—	—	15	—	—	30	—	—	37	—	—	45	—	—	75
460V	—	—	3	—	—	—	—	—	—	5	—	—	—	—	—	10	—	—	10	—	—	20	—	—	50	—	—	60	—	—	75	—	—	125
575V	—	—	3	—	—	—	—	—	—	5	—	—	—	—	—	7-1/2	—	—	10	—	—	20	—	—	60	—	—	75	—	—	100	—	—	125
660/690V <sup>®</sup>	3	—	—	—	4	—	—	—	—	—	—	—	4.5	—	—	6.5	—	—	6.5	—	—	12	—	—	30	—	—	35	—	—	45	—	—	90
1000V <sup>®</sup>	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Built-in Auxiliary Contacts	10 = 1NO 01 = 1NC												00 = 0NO-0NC																							
Coil Options	<b>Coil Voltage</b> 110V 50 Hz, 120V 60 Hz 220V 50 Hz, 240V 60 Hz 230V 50 Hz 24V 50/60 Hz 24V DC <b>Code</b> A B F T TD <sup>®</sup>				<b>Coil Voltage</b> 415V 50 Hz, 480V 60 Hz 550V 50 Hz, 600V 60 Hz 208V 60 Hz 190V 50 Hz, 220V 60 Hz 240V 50 Hz, 277V 60 Hz 380V 50 Hz, 440V 60 Hz <b>Code</b> C D E G H L				<b>Coil Voltage</b> 400V 50 Hz 380V 60 Hz 12V 50/60 Hz 24V 50 Hz 42V 50 Hz, 48V 60 Hz 48V 50 Hz <b>Code</b> N P R U W Y				<b>Coil Voltage</b> 120V DC 220V DC 12V DC 48V DC <b>Code</b> AD <sup>®</sup> BD <sup>®</sup> RD <sup>®</sup> WD <sup>®</sup>				<b>Coil Voltage</b> 110V 50 Hz, 120V 60 Hz 220V 50 Hz, 240V 60 Hz 230V 50 Hz 24V 50/60 Hz 24-27V DC <b>Code</b> A B F T TD <sup>®</sup>				<b>Coil Voltage</b> 415V 50 Hz, 480V 60 Hz 550V 50 Hz, 600V 60 Hz 208V 60 Hz 190V 50 Hz, 220V 60 Hz 240V 50 Hz, 277V 60 Hz 380V 50 Hz, 440V 60 Hz <b>Code</b> N P R U W Y				<b>Coil Voltage</b> 110-130V DC 200-240V DC 12-14V DC 48-60V DC <b>Code</b> AD <sup>®</sup> BD <sup>®</sup> RD <sup>®</sup> WD <sup>®</sup>				<b>Coil Voltage</b> 100-120V 50/60 Hz 190-240V 50/60 Hz 24V 50/60 Hz 24-27V DC 480-500V 50/60 Hz 380-440V 50/60 Hz <b>Code</b> A B T TD <sup>®</sup> C L				<b>Coil Voltage</b> 42-48V 50/60 Hz 110-130V DC 200-240V DC 48-60V DC <b>Code</b> W AD <sup>®</sup> BD <sup>®</sup> WD <sup>®</sup>			

AC Magnet Coil Data	Pick-Up VA	50/60 Hz	25	25	24-29	24-29	24-29	24-29	24-29	50-62	50-62	50-62	150-185	150-185	150-185	310-375	310-375	130	130
Sealed VA	50/60 Hz	4.6	4.6	4.0-4.4	4.0-4.4	4.0-4.4	4.0-4.4	4.0-4.4	4.0-4.4	8.0-9.1	8.0-9.1	8.0-9.1	16.0-19.0	16.0-19.0	16.0-19.0	26.0-31.0	26.0-31.0	3.5	3.5

Wire Ranges	AWG	mm <sup>2</sup>	AWG	mm <sup>2</sup>	AWG	mm <sup>2</sup>	AWG	mm <sup>2</sup>	AWG	mm <sup>2</sup>	AWG	mm <sup>2</sup>	AWG	mm <sup>2</sup>	AWG	mm <sup>2</sup>	AWG	mm <sup>2</sup>	AWG	mm <sup>2</sup>	AWG	mm <sup>2</sup>	AWG	mm <sup>2</sup>	AWG	mm <sup>2</sup>	AWG	mm <sup>2</sup>	AWG	mm <sup>2</sup>	AWG	mm <sup>2</sup>		
Main Cable <sup>®</sup>	18-14	1 x (0.75-1.5) 2 x (0.75-1.5)	18-14	1 x (0.75-1.5) 2 x (0.75-1.5)	18-14	1 x (0.75-4) 2 x (0.75-2.5)	18-14	1 x (0.75-4) 2 x (0.75-2.5)	18-14	1 x (0.75-4) 2 x (0.75-2.5)	18-14	1 x (0.75-4) 2 x (0.75-2.5)	18-6	1 x (0.75-16) 2 x (0.75-10)	18-6	1 x (0.75-16) 2 x (0.75-10)	18-6	1 x (0.75-16) 2 x (0.75-10)	12-2	1 x (2.5-35) 2 x (2.5-25)	12-2	1 x (2.5-35) 2 x (2.5-25)	12-2	1 x (2.5-35) 2 x (2.5-25)	8-250MCM	1 x (10-95) 2 x (10-70)	8-250MCM	1 x (10-95) 2 x (10-70)	8-3/0	1 x (10-95) 6-2/0	8-3/0	1 x (10-95) 6-2/0	8-3/0	1 x (10-95) 2 x (10-70)
Control Circuits <sup>®</sup>	18-14	1 x (0.75-1.5) 2 x (0.75-1.5)	18-14	1 x (0.75-1.5) 2 x (0.75-1.5)	18-14	1 x (0.75-4) 2 x (0.75-2.5)	18-14	1 x (0.75-4) 2 x (0.75-2.5)	18-14	1 x (0.75-4) 2 x (0.75-2.5)	18-14	1 x (0.75-4) 2 x (0.75-2.5)	18-14	1 x (0.75-4) 2 x (0.75-4)	18-14	1 x (0.75-4) 2 x (0.75-4)	18-14	1 x (0.75-4) 2 x (0.75-4)	18-14	1 x (0.75-4) 2 x (0.75-4)	18-14	1 x (0.75-4) 2 x (0.75-4)	18-14	1 x (0.75-4) 2 x (0.75-4)	18-14	1 x (0.75-4) 2 x (0.75-4)	18-14	1 x (0.75-4) 2 x (0.75-4)	18-14	1 x (0.75-4) 2 x (0.75-4)	18-14	1 x (0.75-4) 2 x (0.75-4)		

Auxiliary Contacts	XTMCX	F	A	C	02	XTCEX	F	A	C	C	11	XTCEX	F	A	G	C	22
		F = Front mount	Blank = Screw terminals C = Spring cage terminals		02 = 2NC 04 = 4NC 11 = 1NO-1NC 13 = 1NO-3NC 40 = 4NO		F = Front mount	Blank = Screw terminals C = Spring cage terminals		Blank = Screw terminals C = Spring cage terminals	02 = 2NC 04 = 4NC 11 = 1NO-1NC 13 = 1NO-3NC 20 = 2NO 22 = 2NO-2NC 31 = 3NO-1NC 40 = 4NO		F = Front mount S = Side mount	A = seq A B = seq B BL = seq BL	G = Front mount, frames D-G N = Side mount, frames D-N	Blank = Screw terminals C = Spring cage terminals	02 = 2NC 04 = 4NC 11 = 1NO-1NC 13 = 1NO-3NC 20 = 2NO 22 = 2NO-2NC 31 = 3NO-1NC 40 = 4NO

Overload Relay	XTOM	004	A	C1	XTOB	001	B	C1	XTOB	010	C	C1	XTOB	040	D	C1	XTOB	100	F	C1
		P16 = 0.10 - 0.16A P24 = 0.16 - 0.24A P40 = 0.24 - 0.40A P60 = 0.40 - 0.60A 001 = 0.60 - 1A 1P6 = 1.0 - 1.6A 2P4 = 1.6 - 2.4A 004 = 2.4 - 4A 006 = 4 - 6A 009 = 6 - 10A 012 = 9 - 12A		C1 = Class 10		P16 = 0.10 - 0.16A P24 = 0.16 - 0.24A P40 = 0.24 - 0.40A P60 = 0.40 - 0.60A 001 = 0.60 - 1A 1P6 = 1.0 - 1.6A 2P4 = 1.6 - 2.4A 004 = 2.4 - 4A 006 = 4 - 6A 010 = 6 - 10A 012 = 9 - 12A 016 = 12 - 16A		C1 = Class 10		P16 = 0.10 - 0.16A P24 = 0.16 - 0.24A P40 = 0.24 - 0.40A P60 = 0.40 - 0.60A 001 = 0.60 - 1A 1P6 = 1.0 - 1.6A 2P4 = 1.6 - 2.4A 004 = 2.4 - 4A 006 = 4 - 6A 010 = 6 - 10A 012 = 9 - 12A 024 = 16 - 24A 032 = 24 - 32A		C1 = Class 10		010 = 6 - 10A 016 = 10 - 16A 024 = 16 - 24A 040 = 24 - 40A 057 = 40 - 57A 065 = 50 - 65A		C1 = Class 10		035 = 25 - 35A 050 = 35 - 50A 070 = 50 - 70A 100 = 70 - 100A 125 = 95 - 125A G-frame only 150 = 120 - 150A	F = 80 - 95A G = 115 - 150A	C1 = Class 10

Catalog Numbering System	Mini Contactors Example:	Contactors Example:	Starters Example:
	XTMC 6 A 01 A XTMC: XT Non-reversing Mini Contactor 6: Amp Rating A: Frame 01: Auxiliary Contact Configuration A: Coil Code	XTCE 007 B 01 A XTCE: XT Non-reversing Contactor 007: Amp Rating B: Frame 01: Auxiliary Contact Configuration A: Coil Code	XTAE 007 B 10 A 004 XTAE: XT Non-reversing Starter 007: Amp Rating B: Frame 10: Auxiliary Contact Configuration A: Coil Code 004: Overload Relay Amp Range

® For 185 - 2000A Contactors at 660/690V or 1000V: Do not reverse directly. ® 7 - 65A - flexible with ferrule cable, 185 - 2000A - flexible with cable lug. ® Flexible with ferrule cable. ®With DC Operation: Integrated diode-resistor combination, coil rating 2.6W. ®Contact Eaton for availability.

# XT IEC Power Control


	Frame Size L						Frame Size M						Frame Size N						Frame Size P		Frame Size R	

<b>Contactor: Basic Catalog Number</b>	XTCE185L		XTCE225L		XTCE250L		XTCE300M		XTCE400M		XTCE500M		XTCE580N		XTCE650N		XTCE750N		XTCE820N		XTCEC10N		XTCEC14P		XTCEC20R			
<b>Current Ratings (I) IEC 60947-4-1 AC-1 Thermal Current I<sub>th</sub></b>	275 Amperes		315 Amperes		350 Amperes		400 Amperes		500 Amperes		700 Amperes		800 Amperes		850 Amperes		900 Amperes		1000 Amperes		1000 Amperes		1400 Amperes		2000 Amperes			
<b>AC-3 Operational Power Ratings I<sub>e</sub></b>	kW	hp	kW	hp	kW	hp	kW	hp	kW	hp	kW	hp	kW	hp	kW	hp	kW	hp	kW	hp	kW	hp	kW	hp	kW	hp	kW	hp
200V	—	50	—	60	—	75	—	100	—	125	—	150	—	200	—	200	—	250	—	290	—	—	—	—	—	—	—	—
220/230V	55	60	70	75	75	100	90	125	125	150	155	200	185	200	205	250	240	300	260	350	315	—	—	—	—	—	—	—
380/400V	90	—	110	—	132	—	160	—	200	—	250	—	315	—	355	—	400	—	450	—	560	—	—	—	—	—	—	—
460V	—	125	—	150	—	200	—	250	—	300	—	400	—	400	—	500	—	600	—	700	—	—	—	—	—	—	—	—
575V	—	150	—	200	—	250	—	300	—	400	—	500	—	600	—	600	—	700	—	860	—	—	—	—	—	—	—	—
660/690V <sup>®</sup>	175	—	215	—	240	—	286	—	344	—	344	—	516	—	630	—	720	—	750	—	1000	—	—	—	—	—	—	—
1000V <sup>®</sup>	108	—	108	—	108	—	132	—	132	—	132	—	600	—	600	—	800	—	800	—	1000	—	—	—	—	—	—	—

<b>Built-in Auxiliary Contacts</b>	22 = 2NO-2NC																									
<b>Coil Options</b>	<b>Coil Voltage</b> 110 – 250V 40 – 60 Hz AC/DC 250 – 500V 40 – 60 Hz AC/DC 48 – 110V 40 – 60 Hz AC/DC 24 – 48V AC/DC																		<b>Code</b> A C y <sup>®</sup> TD <sup>®</sup>		<b>Coil Voltage</b> 220 – 250V 50/60 Hz DC				<b>Code</b> B	

<b>AC Magnet Coil Data</b>																												
Pick-Up VA 50/60 Hz	250		250		250		450		450		450		800		800		800		800		800		800		1600			
Sealed VA 50/60 Hz	4.3		4.3		4.3		4.3		4.3		4.3		7.5		7.5		7.5		7.5		7.5		7.5		15			
<b>Wire Ranges</b>	AWG	mm <sup>2</sup>	AWG	mm <sup>2</sup>	AWG	mm <sup>2</sup>	AWG	mm <sup>2</sup>	AWG	mm <sup>2</sup>	AWG	mm <sup>2</sup>	AWG	mm <sup>2</sup>	AWG	mm <sup>2</sup>	AWG	mm <sup>2</sup>	AWG	mm <sup>2</sup>	AWG	mm <sup>2</sup>	AWG	mm <sup>2</sup>	AWG	mm <sup>2</sup>	AWG	mm <sup>2</sup>
Main Cable <sup>®</sup>	1/0-250MCM	50-240	1/0-250MCM	50-240	1/0-250MCM	50-240	1/0-250MCM	50-240	1/0-250MCM	50-240	1/0-250MCM	50-240	2/0-500MCM	50-240	2/0-500MCM	50-240	2/0-500MCM	50-240	2/0-500MCM	50-240	2/0-500MCM	50-240	2/0-500MCM	50-240	2/0-500MCM	50-240	2/0-500MCM	50-240
Control Circuits <sup>®</sup>	2 x (18-12)	1 x (0.75-2.5) 2 x (0.75-2.5)	2 x (18-12)	1 x (0.75-2.5) 2 x (0.75-2.5)	2 x (18-12)	1 x (0.75-2.5) 2 x (0.75-2.5)	2 x (18-12)	1 x (0.75-2.5) 2 x (0.75-2.5)	2 x (18-12)	1 x (0.75-2.5) 2 x (0.75-2.5)	2 x (18-12)	1 x (0.75-2.5) 2 x (0.75-2.5)	2 x (18-12)	1 x (0.75-2.5) 2 x (0.75-2.5)	2 x (18-12)	1 x (0.75-2.5) 2 x (0.75-2.5)	2 x (18-12)	1 x (0.75-2.5) 2 x (0.75-2.5)	2 x (18-12)	1 x (0.75-2.5) 2 x (0.75-2.5)	2 x (18-12)	1 x (0.75-2.5) 2 x (0.75-2.5)	2 x (18-12)	1 x (0.75-2.5) 2 x (0.75-2.5)	2 x (18-12)	1 x (0.75-2.5) 2 x (0.75-2.5)		

**Auxiliary Contacts**




**XTCEX**

- F** = Side mount
- B** = seq B  
**BL** = seq BL
- N** = Frames D – N
- C** = Spring cage terminals
- 11** = 1NO-1NC

**Overload Relay**


**XTOB** 125 L C1

- 070 = 50 – 70A
- 100 = 70 – 100A
- 125 = 95 – 125A
- 160 = 120 – 160A
- 220 = 160 – 220A
- 250 = 200 – 250A
- C1 = Class 10



**XTOT** 160 C3 S

- 063 = 42 – 63A
- 090 = 60 – 90A
- 125 = 85 – 125A
- 160 = 110 – 160A
- 240 = 160 – 240A
- 290 = 190 – 290A
- 400 = 270 – 400A
- 540 = 360 – 540A
- 630 = 420 – 630A
- C3 = Class 30
- S = Separate mounting only for XTOT

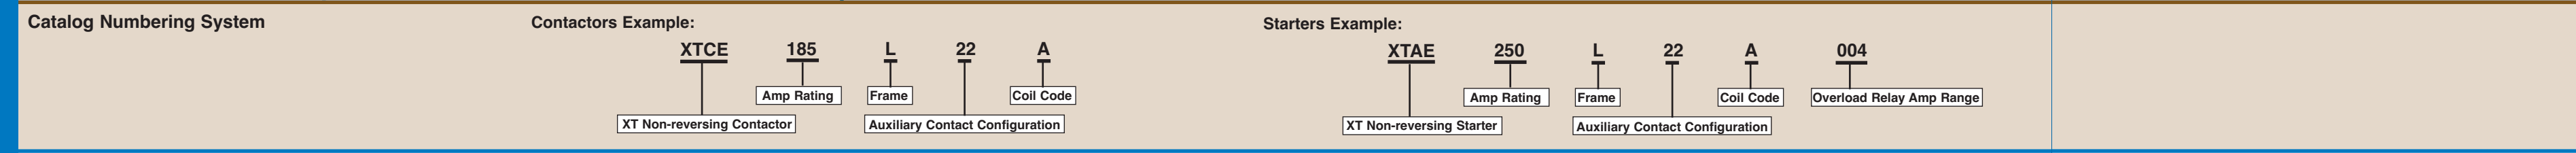

® For 185 – 2000A Contactors at 660/690V or 1000V: Do not reverse directly. ® 7 – 65A — flexible with ferrule cable, 185 – 2000A — flexible with cable lug. ® Flexible with ferrule cable. ®With DC Operation: Integrated diode-resistor combination, coil rating 2.6W.



**Eaton's electrical business is a global leader in electrical control, power distribution, and industrial automation products and services. Through advanced product development, world-class manufacturing methods, and global engineering services and support, Eaton's electrical business provides customer-driven solutions under brand names such as Cutler-Hammer®, Powerware®, Durant®, Heinemann®, Holec® and MEM®, which globally serve the changing needs of the industrial, utility, light commercial, residential, and OEM markets. For more information, visit [www.EatonElectrical.com](http://www.EatonElectrical.com).**

**Eaton Corporation is a diversified industrial manufacturer with 2006 sales of \$12.4 billion. Eaton is a global leader in electrical systems and components for power quality, distribution and control; fluid power systems and services for industrial, mobile and aircraft equipment; intelligent truck drivetrain systems for safety and fuel economy; and automotive engine air management systems, powertrain solutions and specialty controls for performance, fuel economy and safety. Eaton has 60,000 employees and sells products to customers in more than 125 countries. For more information, visit [www.eaton.com](http://www.eaton.com).**

